



STANDARD CONFIGURATION -

LEG CONFIG.

TYPE	SINGLE STAGE (INVERTED)
QTY	2-LEG
PROFILE	RECTANGULAR (SMALL)

FOOT CONFIG.

TYPE	EDGE LITE	
MOUNTING POSITION	CENTER	
LENGTH	587 mm	23.1 in

FRAME DIMENSIONS

FRAME SIZE			
WIDTH, W _F	S M L XL	972 mm 1175 mm 1353 mm 1557 mm	38.3 in 46.3 in 53.3 in 61.3 in
DEPTH, $D_{\rm F}$		450 mm	17.7 in
REC. DESK SIZE			
WIDTH, W_R	S M L XL	1067 mm 1270 mm 1448 mm 1651 mm	42.0 in 50.0 in 57.0 in 65.0 in
DEPTH, D_R	610 r	mm →→ 762 mm	24.0 in → 30.0 in

HEIGHT RANGE

ANGE (*HEIGHT REFLECTS 1" TOP AND FOOT)

NO

HEIGHT, H*	714 mm →→ 1154 mm	28.1 in
STROKE, S	440 mm	17.3 in

BIFMA COMPLIANT


HANDSET

3 MEM. POS. W/ DIGITAL DISPLAY

FINISH

FRAME FINISH		
SLV	BLK	WHT
OPERATION		
SPEED	24.0 mm/s	0.94 in/s

SPEED	24.0 mm/s		0.94 in/s
MAX LIFT CAPACITY	90.7 kg		200 lbs
RATED LOAD	72.5 kg		160 lbs
NOISE		48 dB	

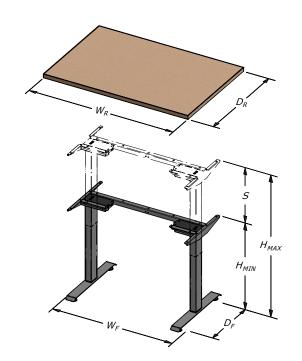

SHIPPING

PACKAGE PARAMETERS ($L_P \times W_P \times H_P$ wt.)

1-BOX (ISTA CERTIFIED)

1 (S)		1067 mm X 381 mm X 203 mm	21.8 kg
		[42.0 in X 15.0 in X 8.0 in]	[48 lb]
	1 (M)	1270 mm X 381 mm X 203 mm	21.8 kg
	L	[50.0 in X 15.0 in X 8.0 in]	[48 lb]
	1 (L)	1473 mm X 381 mm X 203 mm	21.8 kg
	[58.0 in X 15.0 in X 8.0 in]	[48 lb]	
1 (XL)	1676 mm X 381 mm X 203 mm	22.7 kg	
	I (AL)	[66.0 in X 15.0 in X 8.0 in]	[50 lb]

KEY FEATURES

KAIDI ENTRY LEVEL BASE

- > Reduced package volume
- + More product per container decreases inbound shipping cost
- + Smaller packaging lowers shipment cost to customers
- > Lighter weight
 - + Overall lighter weight reduces all associated shipping costs
 - + Increases mobility for DIY assemblers
- > Streamlined design
 - + Simplification of the frame makes for an attractive aesthetic

