





T-STYLE

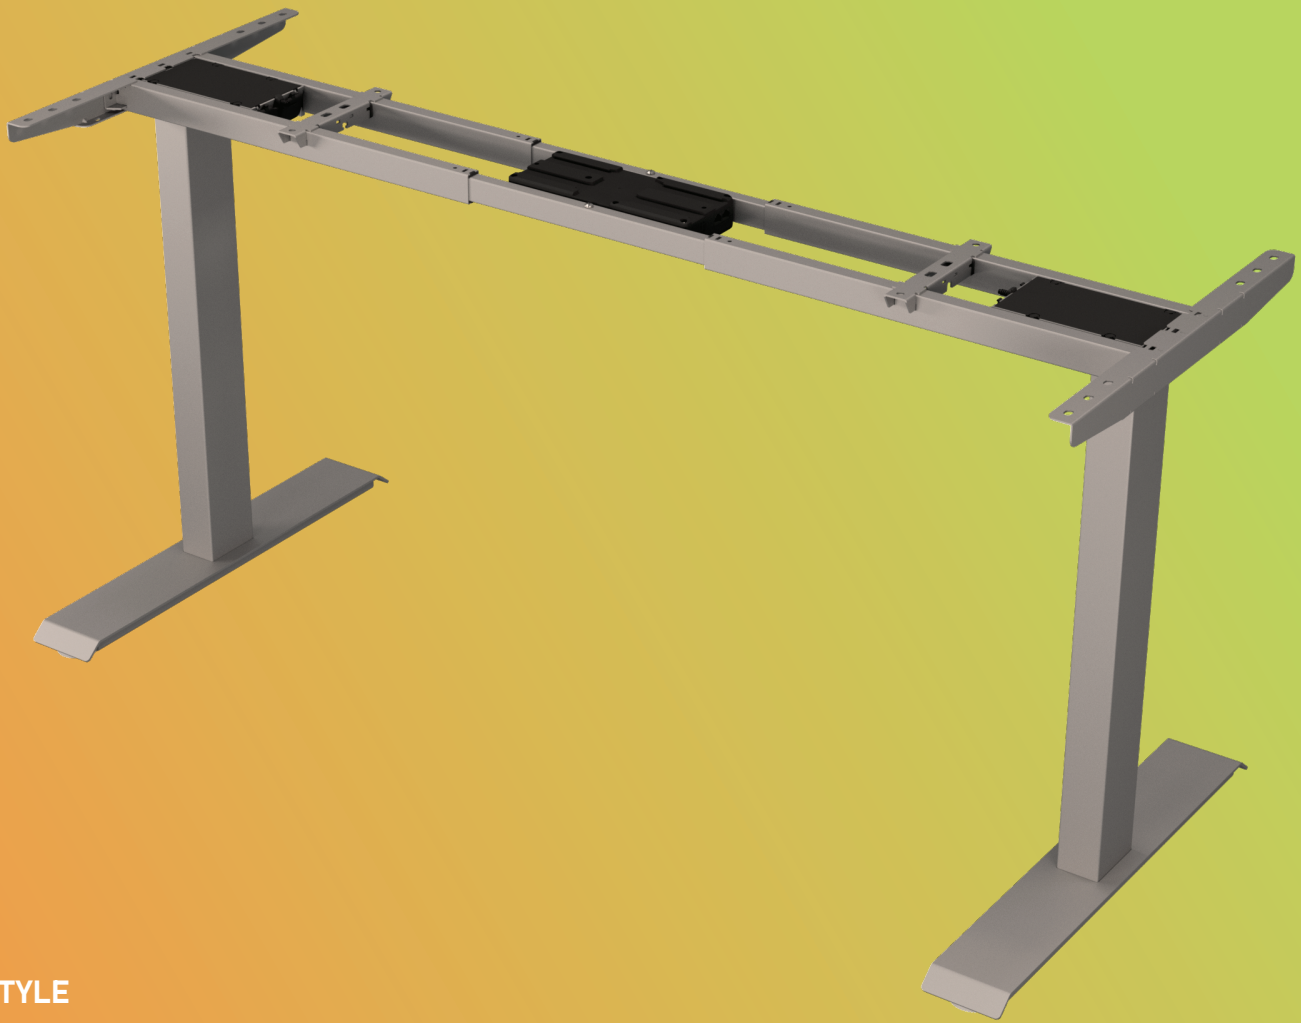

C-STYLE

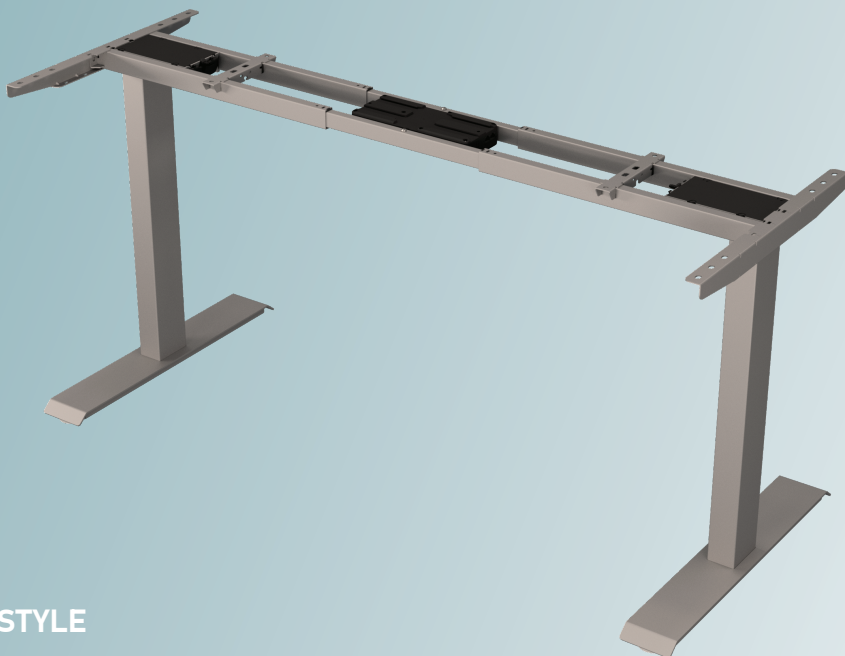

KDH064C

The KAIDI V4

New Innovation, New Quick Install

Features:

- New Quick Install Columns
- New Universal Sidebeams for simple C-style to T-style offering
- Quick Install Control Box (optional)
- Quick Install Feet (optional)
- More bases per container

FEATURES OF THE KDH064C

Digital Display

With Error Codes for
Easy Troubleshooting

Easy Up and Down Functions

3-Position Memory

Adjustable Gyro Anti-Collision Sensitivity

TECHNICAL SPECS **KDH064C + KDBC40**

Speed	1.4 ⁱⁿ / _{sec} / 36 ^{mm} / _{sec}
Max Dynamic Load	359lb / 163kg
Max Static Load	359lb / 163kg
Rated Load	269lb / 122kg
Operational Noise	48dB
Column Profile	1.97x2.15in / 50x80mm

SINGLE STAGE

Stroke Distance	19.7 in / 500 mm
Height Range	27.7–46.3in / 678–1178mm


DUAL STAGE

Stroke Distance	25.6in / 650mm	26.1in / 663mm
Height Range	22.8–48.4in / 580–1230mm	21.1–47.2in / 536–1199mm

Feet+Column+Frame. Without Top

SINGLE STAGE, V4 STANDARD

KDZT066 + KDTJ077-4 + KDF006F

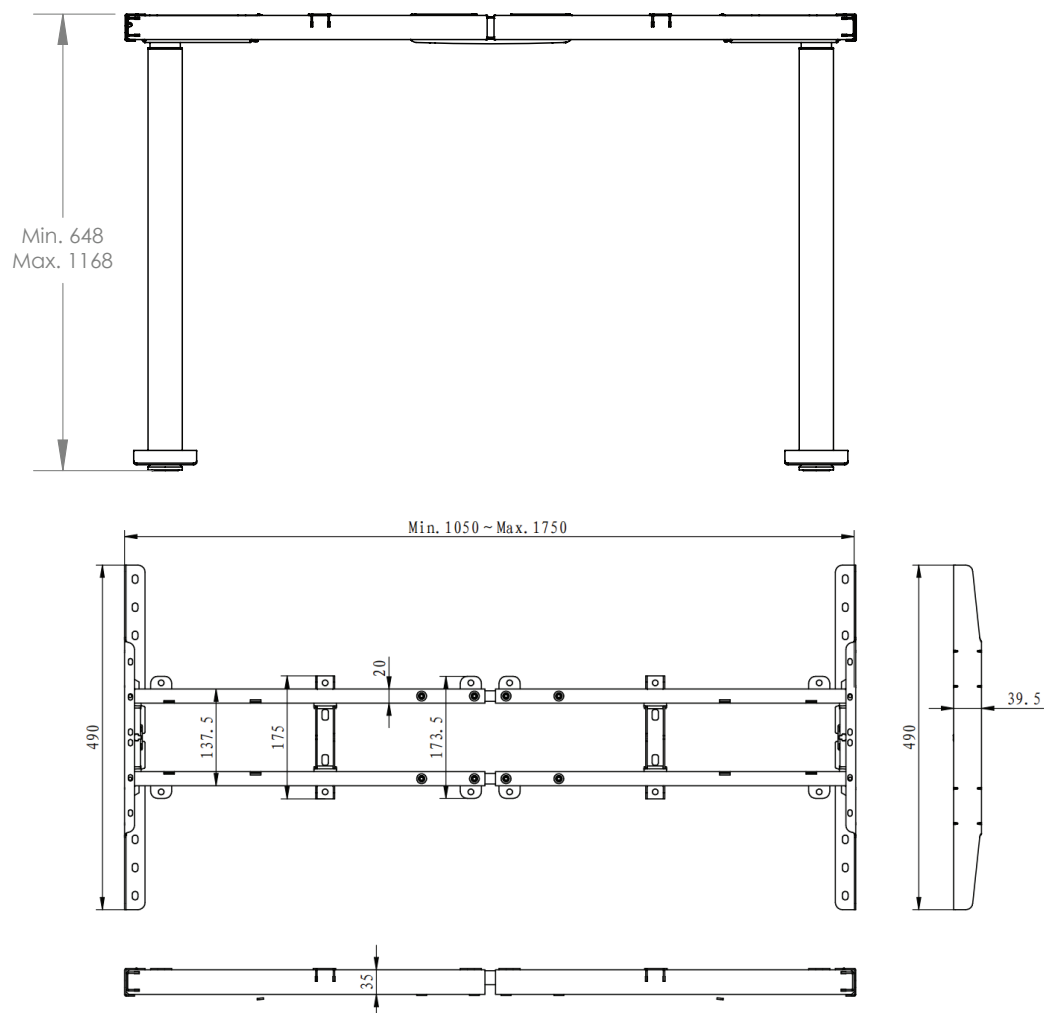

LIFTING COLUMNS

Profile Rectangle, Outer Tube
Dimensions 3.15in×1.96in / 80mm×50mm

FOOT CONFIGURATION

Configuration Centered
Dimensions 23in × 2.8in × 1.3in
 586mm × 70mm × 34mm

FRAME

Expandable Up To 41.3–68.9in / 1050–1750mm
Rcmd. Desktop Size 42–74in / 1066–1880mm

FINISHES

Black, Silver, White

V4 QUICK INSTALL

- ↑ Updated Lifting Column
- ⌚ Improved Efficiency
- 🔊 Lower Noise

1-BOX SHIPPING

Package Dimensions 42.1in×9.8in×6.6in
 1070mm×250mm×170mm
Package Weight 59.7lbs / 27.1 kg